


WK 026

SCS 5K/10K/16K BALL VALVES

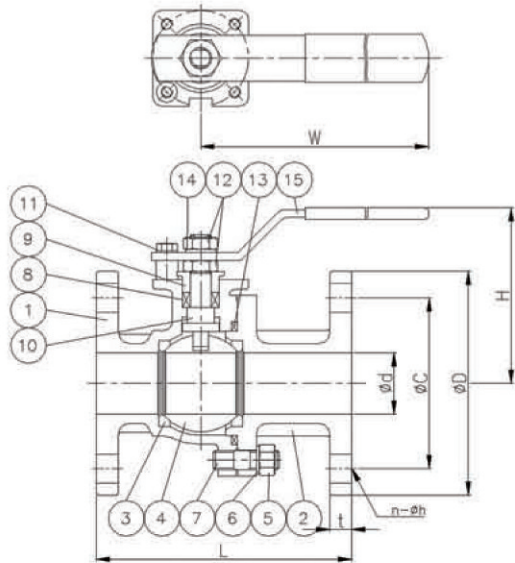

Material List

NO.	Part	Material
1	Body	SCS13,14,16
2	Bonnet	SCS13,14,16
3	Seat	PTFE
4	Ball	SUS304,316,316L
5	Hex. nut	SUS304
6	Spring washer	SUS304
7	Stud bolt	SUS304
8	Packing	PTFE
9	Packing gland	SUS304
10	Stem	SUS304,316,316L
11	Stopper	SUS304
12	Hex. nut	SUS304
13	Gasket	PTFE
14	Spring washer	SUS304
15	Handle	SUS304

Dimensions

unit : mm

Rating	Size	φd	L	H	FF Flange				W
					φD	φC	t	n-φh	
5K	15A	15	100	64	80	60	9	4-12	145
	20A	20	110	66	85	65	10	4-12	145
	25A	25	120	90	95	75	10	4-12	180
	32A	32	140	95	115	90	12	4-15	210
	40A	40	160	100	120	95	12	4-15	210
	50A	50	210	115	130	105	14	4-15	210
10K	65A	65	250	130	155	130	14	4-15	290
	15A	15	110	72	95	70	12	4-15	140
	20A	20	120	80	100	75	14	4-15	140
	25A	25	130	90	125	90	14	4-19	180
	32A	32	160	95	135	100	16	4-19	210
	40A	40	180	100	140	105	16	4-19	210
16K	50A	50	178	115	155	120	16	4-19	210
	65A	65	190	130	175	140	18	8-19	290
	80A	80	203	135	200	160	20	8-23	300

Hydro. test pressure

unit : kgf/cm²

Rating	5	10	16
Sheel hydraulic test	10.5	21	33
Seat hydraulic test	7.7	15.4	24.2